Homax®

Ceiling Texture

Textura para techo

ORANGE PEEL KNOCKDOWN

Cáscara de naranja Precipitación

Orange Peel • 80 sq. ft. *Cáscara de naranja • 7,43 m²*

Knockdown • 60 sq. ft. *Precipitación • 5,57 m²*

Multi-Pattern Formula

Reparacion de textura para paredes Con formula multipatron

Vertical Spray
Low Odor
Easy Clean-up

Rocío vertical
Olor Bajo
Facil de Limpiar

DANGER! FLAMMABLE VAPOR. CONTENTS UNDER PRESSURE. CAUSES EYE, SKIN AND RESPIRATORY TRACT IRRITATION.
Read other cautions on side/back panel before using.

¡PELIGRO! VAPOR INFLAMABLE. CONTENIDO BAJO PRESIÓN. CAUSA IRRITACIÓN EN LOS OJOS, LA PIEL Y LAS VÍAS RESPIRATORIAS.
Lea otras precauciones en el panel posterior y lateral antes de usar.

Net Wt 20 OZ (567 g)

WATER BASED Base de agua

Homax® Orange Peel & Knockdown Ceiling Texture is ideal for repairing, remodeling, or even applying orange peel and knockdown textures to a new ceiling surface.

La textura Homax® para cielos rasos es ideal para reparar, remodelar, o incluso aplicar texturas de piel de naranja e impactantes texturas sobre una superficie nueva.

SEE ONLINE DEMO at www.homaxproducts.com/texture

VENTILATE AREA WELL. PROTECT SURROUNDING. AREA FROM OVERSPRAY. DO NOT SPRAY ON CLOTHING, FURNITURE OR CARPET. WEAR EYE PROTECTION AND PROTECTIVE CLOTHING

- Water-based, use warm water for cleanup.
- Sprays best between 68-72°. If pressure is too low, place can in warm water, if pressure is too high, place in can in cold water.

DIRECTIONS: MAKE ANY NECESSARY CEILING REPAIRS BEFORE APPLYING. IF PATCHING OR APPLYING TO NEW DRYWALL, PRIMING SURFACE PRIOR TO APPLICATION IS RECOMMENDED.

1. Shake can vigorously for one minute prior to use.
2. Pointing away from face, carefully place straw designed for pattern of choice securely into actuator.
3. Always practice spraying on cardboard or scrap drywall to determine preferred pattern.

For ORANGE PEEL TEXTURES:

-Place BLACK STRAW in actuator tip.
Hold can vertically and SPRAY at a distance of 12-18" from surface using a sweeping (back and forth) motion. For ***FINER ORANGE PEEL***, heat can by running under warm water.

For KNOCKDOWN TEXTURES:

-Place WHITE STRAW in actuator tip
For ***HEAVY/LARGE KNOCKDOWN*** patterns, build texture up slightly, or spray in short bursts. Allow texture to dry 1-2 minutes before **LIGHTLY KNOCKING DOWN OR FLATTENING** using a 6-8" wet drywall knife. For best results, hold knife almost parallel to the ceiling. Texture can be scraped off and reapplied when still wet until desired pattern is achieved.
PATCHING: Surface should be clean and dry before applying. Priming is recommended. Apply to match existing surface, feathering outward and overlapping existing ceiling texture.
ENTIRE CEILING: Begin applying in one corner and continuously spray an even coat of texture, sweeping back and forth across ceiling (spraying in short bursts will tend to result in inconsistent splatter sizes). Texture can be scraped off while still wet if you wish to re-apply.
DRY TIME: Allow to dry 2-5 hours before painting (depending on heaviness of pattern).

4. To store, remove straw, turn upside down and spray until texture is cleared.

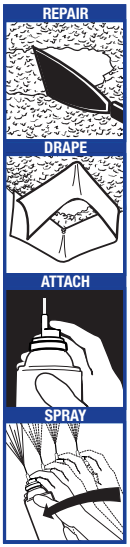

VENTILE BIEN EL ÁREA. PROTEJA LAS ZONAS CIRCUNDANTES DEL ROCIADO EXCESIVO. NO ROCÍE EN LA ROPA, LOS MUEBLES O LA ALFOMBRA.

- A base de agua, use agua tibia para limpiar.
- Rocíe preferentemente a temperatura ambiente. Si la presión es muy baja, sumerja el envase en agua tibia; en caso de que sea demasiado elevada, sumérjalo en agua fría.

INSTRUCCIONES DE USO: ANTES DE LA APLICACIÓN, REPARE LA PARED SEGÚN SEA NECESARIO. PARA OBTENER MEJORES RESULTADOS, APLIQUE PINTURA BASE O SELLE EL ÁREA ANTES Y DESPUÉS DE APLICAR LA TEXTURA.

1. Agite la lata vigorosamente durante un minuto antes de usarla.
2. Apunte lejos de la cara, coloque de manera segura la cánula diseñada para el patrón de su elección, dentro del dispositivo de accionamiento.
3. Siempre practique el rociado en cartón o un fragmento de panel de yeso para determinar la modalidad que prefiere.

PARA TEXTURAS DE PIEL DE NARANJA:

-Use la cánula de color negro
Para un acabado de ***PIEL DE NARANJA FINO***, caliente la lata colocándola sobre una corriente de agua caliente. ROCÍE manteniendo una distancia de 12-18" (30-46 cm) de la superficie.

PARA TEXTURAS CON ACABADO PLANCHADO:

-Use la cánula de color blanco
Para ***PRECIPITACIÓN GRUESO*** Para obtener patrones de salpicado más grueso o abundante, acumule levemente la textura o rocíe dando toques cortos. Deje secar la textura 1 ó 2 minutos antes de **PLANCHARLA O EMPAREJARLA LIGERAMENTE** con una espátula de 6-8 pulgadas (15-20 cm). Para obtener mejores resultados, sostenga la espátula casi paralela a la pared.
REMIENDO: La superficie debe estar limpia y seca antes de realizar la aplicación. Se recomienda la aplicación de pintura base. Aplique para igualar la superficie existente, expandiendo hacia fuera y superponiendo la textura nueva sobre la existente.
CIELO RASO COMPLETO: Comience la aplicación en una esquina y aplique una capa de textura rociando en forma continua y pareja, con movimientos hacia delante y atrás en todo el cielo raso (rociar con toques cortos puede producir tamaños de salpicado inconsistentes). Puede quitar la textura raspando y volver a aplicarla mientras aún esté húmeda.
TIEMPO DE SECADO: Deje secar de 2 a 5 horas antes de pintar (dependiendo del grosor del patrón).

4. Coloque el envase con el pico hacia abajo y pulse el aerosol quedará limpia.

Para leer todas las advertencias en español, visite www.homaxproducts.com

DANGER! FLAMMABLE VAPOR. CONTENTS UNDER PRESSURE. CAUSES EYE, SKIN AND RESPIRATORY TRACT IRRITATION. Contains Calcium Carbonate, Clay, Perlite, Titanium Dioxide and Dimethyl Ether (propellent). Vapors may catch fire. Keep away from heat, sparks and flame. Extinguish all flames and sources of ignition during use and until all vapors are gone. Prevent build-up of vapors by opening all windows and doors to achieve cross-ventilation. Store upright in a cool, dry place. Avoid prolonged exposure to sunlight and other heat sources that may cause bursting. Do not puncture, incinerate, burn or store above 120°F. Use with adequate ventilation. Avoid breathing vapor and spray mist. Avoid contact with eyes and skin. Wear safety glasses or goggles. Wash hands after using. **FIRST AID:** For eye contact, flush thoroughly with water for 15 minutes and get medical attention. For skin contact, wash thoroughly with soap and water. If inhaled, remove person to fresh air. If breathing does not improve, get medical attention.

KEEP OUT OF REACH OF CHILDREN.
WARNING! This product contains a chemical known to the state of California to cause cancer.
WARNING! If you scrape, sand or remove old paint, you may release lead dust. LEAD IS TOXIC. Contact the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.
WARNING! If your ceiling texture was applied before 1979, DO NOT attempt to remove it without having it tested for asbestos content. Contact your local Environmental Agency for further information.

Flat Paint Product VOC < 60% MIR <1.20

This product is covered by one or more U.S. Patents.

Homax® A Premier Brand of
The Homax Group, Inc.
Bellingham WA 98227
www.homaxproducts.com
800-729-9029

MADE IN USA
DOT 2P

4067_31068

0 41072 04067 9

0 41072 04067 9